

TAMKO® TWP-1 QUICK DRY PRIMER

Low VOC Waterproofing Primer

PRODUCT DATA

DESCRIPTION

TAMKO TWP-1 is a high quality, rubberized, low VOC primer, formulated for the professional waterproofing contractor.

USES

This quick dry, high-tack primer provides maximum bond to asphalt, concrete, masonry and metal surfaces.

APPLICATION


Apply with a long nap roller or spray equipment at the rate of 250 to 300 square feet per gallon. Allow to cure until the surface is tacky, but will not transfer when touched. Primer should be allowed to dry a minimum of 1 hour, and a maximum of 8 hours. Do not thin with organic solvents.

TYPICAL PHYSICAL PROPERTIES*

Property	Results
Weight per Gallon	7.53 lbs
Solids Content	38% by weight
Tack Free Time	30 min. @ 75°F
VOC	Less than 450 grams/litre
Flash Point	<68°F
Packaging	5 Gallon pails

*All values stated as nominal at time of manufacture.

For safety, health, and handling information contact TAMKO at 800-641-4691 for Material Safety Data Sheets (MSDS).

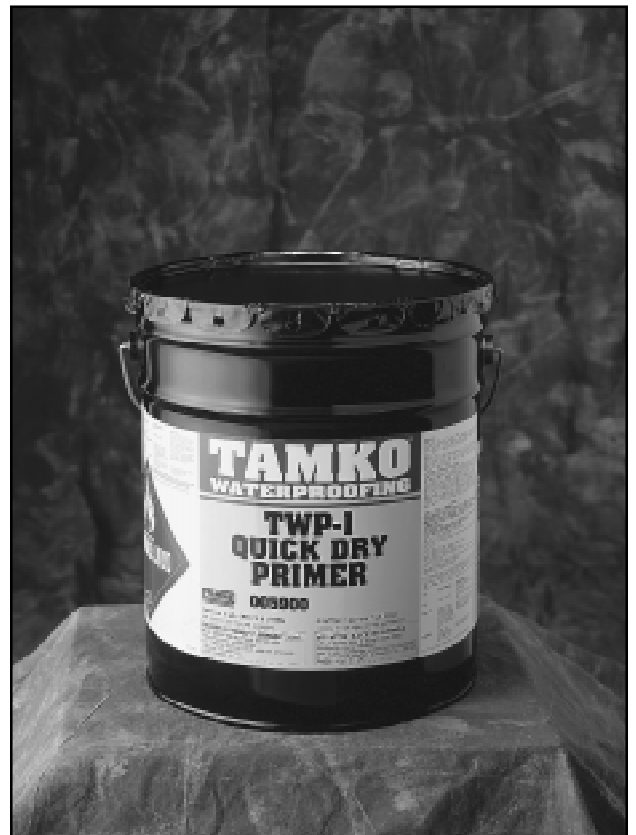

www.tamko.com

Corporate 220 West 4th Street, Joplin, Missouri 64801
Central District 220 West 4th Street, Joplin, Missouri 64801
Northeast District 4500 Tamko Drive, Frederick, Maryland 21701
Southeast District 2300 35th Street, Tuscaloosa, Alabama 35401
Southwest District 7910 South Central Expressway, Dallas, Texas 75216
Western District 5300 East 43rd Avenue, Denver, Colorado 80216

800-841-1923
800-641-4691
800-368-2055
800-228-2656
800-443-1834
800-530-8868

TAMKO®
WATERPROOFING